

Kapildhara[®]

R-PVC & U-PVC Pipes

Complete Piping System

are made with high-quality materials to give you a long-lasting, dependable product.

Complete Range of Pipes & Fittings

RPVC, uPVC, SWR for Plumbing, Garden & Braided Hose Pipe



ABOUT US



**The true choice
of a nation.**

Based in Jabalpur, Madhya Pradesh, India. we have come to be known as a reliable manufacturer and supplier of high quality Pipes like uPVC Pipe, Rigid PVC Pipes, S.W.R. Pipes, garden pipes, delivery hose pipe, I.I.D.P.E pipe, H.D.P.E sprinkler pipes and fittings, H.D.P.E coils. Soon we are expanding our reach on many new segments such as column pipes, cpvc pipes and fittings, agriculture and buildings use fittings. Our company is backed by a team of thorough professionals, who ensure that all our products are manufactured with immense preciseness and the requirements of our clients are fulfilled. We utilize latest techniques of production and quality raw material in the making of our range as a result of which our products are acknowledged for their sturdy construction, durability, accurate dimensions, rust resistant and reliability.



VISION

To continuously improve quality of products

To keep on increasing the productivity and introducing new products

To utilize best practices in processes and technologies

To accomplish our vision through decency, innovation, worldwide span, ethical values & business morals.

MISSION

R-PVC Piping System

- High Tensile & Impact Strength
- Heat & Flame Resistant
- Smooth Internal Surface
- Longer Life Span
- Maintenance Free
- Anti-Corrosion / Anti-Rusting
- Co-Moulded Composite Rubber Ring Seal
- UV Stabilized



TECHNICAL SPECIFICATIONS & PRICE

SIZE	INCHES	KG/PRESSURE	MRP
90 mm	3	2.5 kg.	846
110 mm	4	2.5 kg.	1254
140 mm	5	2.5 kg	1922

SIZE	INCHES	KG/PRESSURE	MRP
63 mm	2	4 kg.	613
75 mm	2.5	4 kg.	838
90 mm	3	4 kg.	1269
110 mm	4	4 kg.	1769
140 mm	5	4 kg.	3069
160 mm	6	4 kg.	3738
180 mm	7	4 kg.	5438
200 mm	8	4 kg.	5891
225 mm	9	4 kg.	7013
250 mm	10	4 kg.	8500

ITEM	INCHES	KG/PRESSURE	MRP
40 mm	1.25	6 kg.	340
50 mm	1.5	6 kg.	531
63 mm	2	6 kg.	808
75 mm	2.5	6 kg.	1126
90 mm	3	6 kg.	1658
110 mm	4	6 kg.	2401
140 mm	5	6 kg.	3825
160 mm	6	6 kg.	5100
180 mm	7	6 kg.	6800
200 mm	8	6 kg.	8075
225 mm	9	6 kg.	9775
250 mm	10	6 kg.	12750

FEATURES



Corrosion Resistant



High Strength



UV Resistant



Light Weight



Chemical Resistant

APPLICATION



Irrigation



Chemical Distribution



Suitable for Sandy & Saline Water



Industrial Mining



Industrial Use



IS : 4985



uPVC Pipes & Fittings



- Ultimate Endurance
- Anti-Contamination
- Thermoplastic Material
- Anti-Fungal
- Economical for up-take, down-take lines, terrace looping, concealed pipe work

ideal for cold water plumbing

Kapildhara uPVC plumbing system (Solvent Weld & Threaded) is the most suitable, easy and economical solutions for distribution of potable water. It is technically superior, cost effective and offers many advantages over conventional G.I. piping system. This system is very easy to install and functionally most suitable for all plumbing applications. Apart from more than 40-50% cheaper to G.I. piping system, it has many more years of service life. This hygienic system is endowed with many good features. It is a value added long term plumbing solution for building industry.

TECHNICAL SPECIFICATIONS & PRICE

Nominal Bore		Outer Diameter (D)	Schedule 40 (6 mtr.)			MRP	Schedule 80 (6 mtr.)			MRP
			Packing 6 mtr.	Working Pressure at			Packing 6 mtr.	Working Pressure at		
				Kg/cm ²	psi			Kg/cm ²	psi	
mm	inch	mm	nos.	Kg/cm ²			nos.	Kg/cm ²		
20	1/2"	21.34±0.10	50	20.7	300	322	50	20.7	300	413
25	3/4"	26.67±0.10	25	16.5	240	436	25	16.5	240	585
32	1"	33.40±0.13	15	15.5	225	643	15	15.5	225	826
40	1-1/4"	42.16±0.13	15	12.7	185	895	15	12.7	185	1170
50	1-1/2"	48.16±0.13	15	11.4	165	1125	15	11.4	165	1446
63	2"	48.26±0.15	10	0.6	140	1446	10	0.6	140	1951
75	2-1/2"	60.32±0.15	10	10.3	150	2387	10	10.3	150	3052

FEATURES



Light Weight



Non Toxic



UV Resistant



Cost Effective



Lead Free



Easy to Install



Cold Water Application

APPLICATION



Cold Water Plumbing in Buildings



Swimming Pools



Aggressive /Corrosive Fluid Transportation



Water Distribution mains



Industrial Process Lines



9001:2015

03

SWR Drainage System

- Economical for up-take, down-take lines, terrace looping, concealed pipe work
- Ultimate Endurance
- Anti-Contamination
- Thermoplastic Material
- Anti-Fungal

Faster Installation Leak-Proof Joints

Kapildhara SWR system include a wide range of Soil, Waste and Rain Water Plumbing products for commercial, industrial, housing and public sector developments. All **Kapildhara SWR system** are available in Adhesive-weld (self fit) and push fit (Ring fit) options with unrevealed installation options & high quality finish.



SWR PIPE RING FIT/PUSH FIT

Size (mm)	Length (mtr.)	Type A 4kg/P	Type B 4kg/P
75	3	332	591
90	3	516	757
110	3	646	978
160	3	1440	2215

SWR PIPE SELF FIT

Size (mm)	Length (mtr.)	Type A 4kg/P	Type B 4kg/P
75	6	664	1182
90	6	1032	1514
110	6	1292	1956
160	6	2880	4430



TECHNICAL SPECIFICATIONS & PRICE Dimension of SWR Pipes IS 13592

Nominal outside dia (D) mm	Tolerance on outside dia mm	Wall thickness-Type A (t) mm		Wall thickness-Type B (t) mm	
		Min.	Max.	Min.	Max.
75	+0.3	1.8	2.2	3.2	3.8
90	+0.4	1.9	2.3	3.2	3.8
110	+0.4	2.2	2.7	3.2	3.8
160	+0.5	3.2	3.8	4.0	4.6

FEATURES



Light Weight



UV Resistant



LeakProof Joints



Yellow Ring Co-Moulded Technology

APPLICATION



Sewage & Waste Water Lines



Rainwater Drainage



Residential Purposes



Industrial Use



Offices



IS : 13592



Garden Hose Pipes

Salient Features

No Weather Effect
Different Colors
Long Lasting
Durable & Flexible



PVC Flexible Garden Pipes

Take good care of your plants with the help of this Assorted Colors flexible garden pipe which is specially designed for people who love to water their plants. Crafted with high in quality PVC material, this hose pipe comes with the great feature of remaining soft in any weather conditions. Plus, it is best suited for different purposes like gardening, water dispensing, convey water to the sprinkler, etc.

TECHNICAL SPECIFICATIONS & PRICE

SIZE	INCHES	LENGTH mtr.	MRP
5 mm	3/16"	30	224
6 mm	1/4"	30	274
8 mm	5/16"	30	348
10 mm	3/8"	30	398
12.5 mm	1/2"	30	870
19 mm	3/4"	30	1243
25 mm	1"	30	1988
32 mm	1.25"	30	2735
40 mm	1.5"	30	3480
50 mm	2"	30	4475




Braided Hose Pipe



TECHNICAL SPECIFICATIONS & PRICE

ITEM	INCHES	LENGTH	MRP
8 mm	5/16"	100 mtr.	2983
10 mm	3/8"	100 mtr.	3797
12.5 mm	1/2"	30 mtr.	950
19 mm	3/4"	30 mtr.	1492
25 mm	1"	30 mtr.	2170
32 mm	1.25"	30 mtr.	3797
40 mm	1.5"	30 mtr.	5153
50 mm	2"	30 mtr.	7322

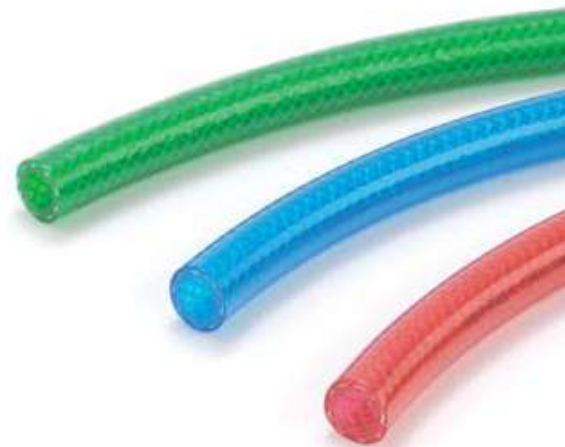



UPCOMING PRODUCTS WILL BE INTRODUCED SHORTLY.


**CPVC, uPVC,
SWR, AGRICULTURE
PIPE FITTINGS**



Casing & Coloumn Pipe

Will be introduced Shortly.

Ideal of
**Flourishing
Farms**

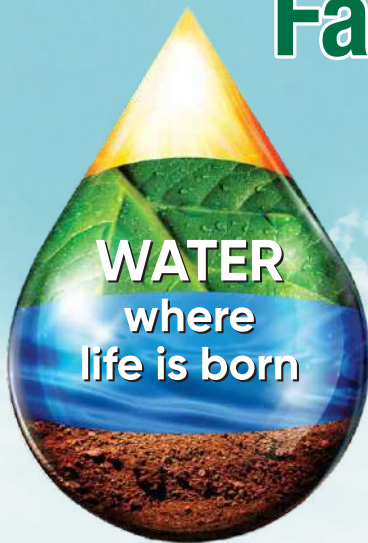

High impact resistant Borewell Piping Systems to withstand extreme pressure at great depths.



PLUMBING



INDUSTRIAL



DRAINAGE



FIRE PROTECTION



AGRICULTURE



CPVC PIPE FITTINGS

RIGHT CHOICE FOR
**HOT &
COLD**
WATER PLUMBING
SYSTEM

*WILL BE INTRODUCED SHORTLY.



uPVC PIPE FITTINGS

ULTIMATE PLUMBING
SOLUTION FOR
COLD
WATER

*WILL BE INTRODUCED SHORTLY.



SWR PIPE FITTINGS

BEST SOLUTION FOR
DRAINAGE
SYSTEM

*WILL BE INTRODUCED SHORTLY.



AGRICULTURE PIPE FITTINGS

BEST SOLUTION FOR
AGRICULTURE
USE

*WILL BE INTRODUCED SHORTLY.





Terms & Conditions:

1. The pipes & other products will be supplied in the standard length.
2. Price are subject to change without any information.
3. This list cancels all our previous list.
4. The dispatches are subject to availability of stocks.
5. All disputes subject to jabalpur jurisdiction.
6. All rates are inclusive of gst.
7. The transaction will be in 100% advance payment.
8. On commencement of business two security cheque required.

KACHNAR POLYMERS PVT. LTD.

Mfg. of PVC pipes, HDPE pipe, HDPE Sprinkler system, PVC suction & delivery hose, fitting and all types of plastic items.

Office Address : Deendayal Chowk In front of ISBT (Bus-Stand)
Beside of Swastik Hospital, Dist. Jabalpur (M.P) India, Pin Code-483220
Contact : +91-9179698889, +91-8770502356
E: kachnarpolymers@gmail.com

Follow us on:    

Disclaimer: All information contained in this manual is given in good faith and believed to be accurate and reliable. No responsibility can be accepted for any error, omissions or incorrect assumptions. Any specification can change without prior notice. All the images are shown for representation purposes only.